




### SERIES TAIS-MIGNON ENCLOSURE

CODE 101025

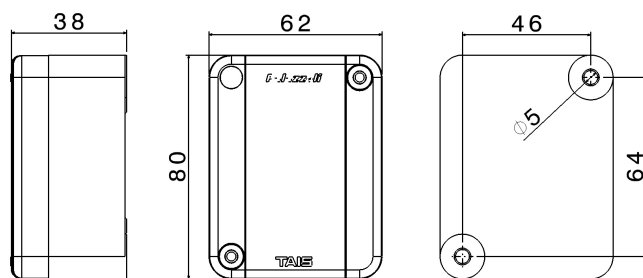

### Datasheet

#### Electrical characteristics

|                          |    |
|--------------------------|----|
| Insulation Class         | II |
| Rated insulation voltage | -  |
| Rated operating voltage  | -  |
| Dissipable Power         | -  |

#### Mechanical characteristics

|                                |                                             |
|--------------------------------|---------------------------------------------|
| Manufacturing material         | Palazzoli Thermosetting GRP                 |
| Treatment type                 | -                                           |
| Surface finishing              | -                                           |
| Color                          | Grey RAL 7035 (Base), Blue RAL 5015 (Cover) |
| Execution                      | Wall mounting                               |
| Height Box                     | 36 mm                                       |
| Cover height                   | 9 mm                                        |
| Cover type                     | Blind                                       |
| N. of modules on DIN rail      | -                                           |
| Hole type                      | M20                                         |
| Window type                    |                                             |
| IP Protection degree           | IP65                                        |
| Additional IPdegree protection | -                                           |
| Shock resistance               | IK04 according to IEC/EN 62262              |
| Resistance to Glow wire        | 960°C                                       |
| Flame rating according UL94    | V-0                                         |
| Corrosivity category           | -                                           |
| Working Environment Temp.      | Min: -25°C ;Max: +70°C                      |
| Warehousing Temperature        | Min: -50°C ;Max: +80°C                      |
| Dimensions                     | 62X80X38 mm                                 |
| Internal dimensions            | -                                           |
| Net Weight                     | 0.17 KG                                     |

#### Reference Standards and Directives

Certification and approval marks NYCE COLOMBIA, CE, UKCA

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)

Reference Standards EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.