




**SERIES TAIS-MIGNON
ENCLOSURE**

CODE 101157

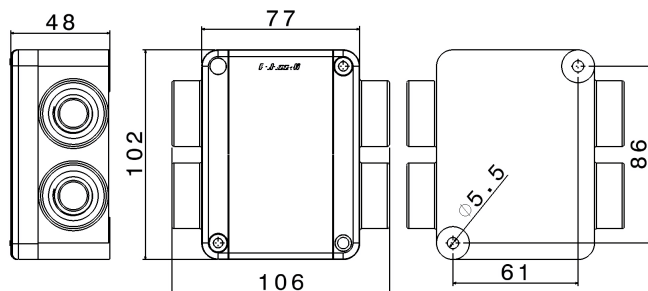

Datasheet

Electrical characteristics

| | |
|--------------------------|----|
| Insulation Class | II |
| Rated insulation voltage | - |
| Rated operating voltage | - |
| Dissipable Power | - |

Mechanical characteristics

| | |
|--------------------------------|---|
| Manufacturing material | Palazzoli Thermosetting GRP |
| Treatment type | - |
| Surface finishing | - |
| Color | Blue RAL 5015 (Cover), Grey RAL 7035 (Base) |
| Execution | Wall mounting |
| Height Box | 35 mm |
| Cover height | 13 mm |
| Cover type | Blind |
| N. of modules on DIN rail | - |
| Hole type | M25 |
| Window type | |
| IP Protection degree | IP65 |
| Additional IPdegree protection | - |
| Shock resistance | IK04 according to IEC/EN 62262 |
| Resistance to Glow wire | 960°C |
| Flame rating according UL94 | V-0 |
| Corrosivity category | - |
| Working Environment Temp. | Min: -25°C ;Max: +70°C |
| Warehousing Temperature | Min: -50°C ;Max: +80°C |
| Dimensions | 77X102X48 mm |
| Internal dimensions | - |
| Net Weight | 0.34 KG |

Reference Standards and Directives

Certification and approval marks UKCA, NYCE COLOMBIA, CE

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)

Reference Standards EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.