


SERIES FIREBOX
Junction box
CODE 151301

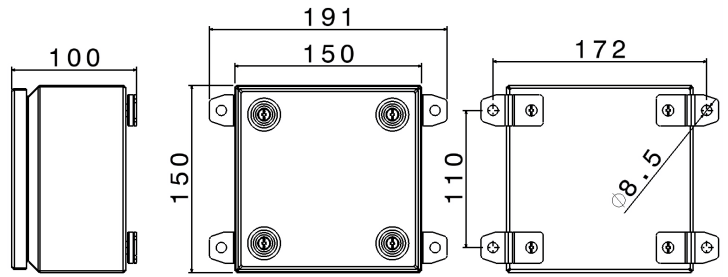

Datasheet

Mechanical characteristics

| | |
|---------------------------|--|
| Manufacturing material | Steel |
| Colour | Orange RAL 2003 |
| Execution | Wall mounting |
| Dimensions | 150X150X90 mm |
| Internal dimensions | 146X146X86 mm |
| Cover type | Blind |
| Hole type | 4xM25 |
| IP Protection degree | IP66/IP67 |
| Shock resistance | IK10 according to IEC/EN 62262 |
| Functional maintenance | 830°C 120' (IEC 60331-1) E30 - E60 - E90 (DIN 4102-12) |
| Corrosivity category | Equivalent to C4(M)/C3(H) (ISO 12944) |
| Working Environment Temp. | Min: -40°C ;Max: +70°C |
| Warehousing Temperature | Min: -50°C ;Max: +90°C |
| Net Weight | 1.41 KG |

Reference Standards and Directives

| | |
|---------------------|--|
| Directives | 2014/35/EU (LVD) |
| Reference Standards | EN 60670-1:2005, EN 60670 -1:2005/A1:2013, EN 60670 -1:2005/AC:2007, EN 60670 -1:2005/AC:2010, EN 60670-22:2006 |

Electrical characteristics

| | |
|-------------------------|-------|
| Insulation Class | I |
| Rated operating voltage | 690V~ |
| Dissipable Power | - |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.