



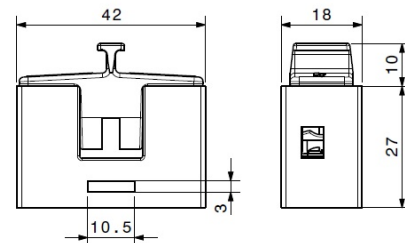

**SERIES CONTACT
FUSE**

CODE 151793



Datasheet

Specifications

Net Weight	0.11 KG
Front panel	151793s.png
Fuse Type	GL 8,5X32
Storage room temperature MIN	-50°C
Max. Amb. Temp.	+100°C
Min. Amb. Temp.	-50°C
Resistance to temperature	830°C per 120 minuti
Terminals type	Screw - direct tightening
Terminal tightening torque	1,2 Nm
Max conductor section	4 mm ²
Min conductor section	0.5 mm ²
Poles	1
Contact material	Brass
Storage room temperature MAX	+100°C
Rated current	25A
Rated operating voltage	400V
Manufacturing material	Ceramic
Rated impul. withstand voltage	6,000 V

Reference Standards and Directives

Certification and approval marks	UKCA, CE
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60269-1/A1:2009, EN 60269-1/A2:2014, EN 60269-1:2007, EN IEC 63000:2018, HD 60269-3:2010, HD 60269-3:2010/A1:2013

The images are purely indicative. Palazzoli reserves the right to make changes without notice.