




**SERIES CONTACT
TERMINAL BLOCK
CODE 159044**

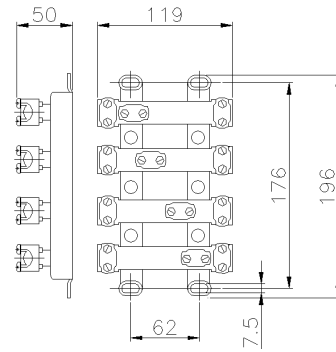

Datasheet

Specifications

| | |
|--------------------------------|--|
| Connecting Terminals | Saddle terminals on ceramic base |
| Manufacturing material | Ceramic |
| Contact material | Brass |
| Terminals type | Screw - indirect clamping |
| No. poles for section | 4x70 mm ² |
| Conductors section (Cu) | Min: 50 ;Max: 70 mm ² |
| Terminal tightening torque | 2 Nm |
| Rated current | 192A |
| Rated operating voltage | 500V |
| Rated impul. withstand voltage | 6,000 |
| Functional maintenance | 830°C 120' (IEC 60331-1) E30 - E60 - E90 (DIN 4102-12) |
| Working Environment Temp. | Min: -50°C ;Max: +100°C |
| Warehousing Temperature | Min: -50°C ;Max: +100°C |
| Net Weight | 1.16 KG |

Reference Standards and Directives

| | |
|---------------------|--|
| Directives | 2011/65/EU (RoHS)2012/19/EU (WEEE)2014/35/EU (LVD) |
| Reference Standards | EN 60999-2:2003EN IEC 63000:2018 |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.