




**SERIES TAIS-MIGNON-Ex  
SELECTOR SWITCH**  
**CODE 202275EX**

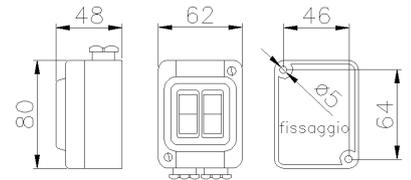

### Datasheet

#### Specifications

Net Weight	0.24 KG
Rated current	16/10A
Frequency	50/60Hz
IP Protection degree	IP66
Poles	1P
Rated operating voltage	250V~/400V~
Manufacturing material	Palazzoli Thermosetting GRP
Width	62 mm
Execution	Wall mounting
Insulation Class	II
Dimensions	136X62X51 mm
Hole type	M20
Number of entries in enclosure	1
Rated current/voltage	16A 250V~10A 400V~
Function Apparatus Control	Selector switches

#### Reference Standards and Directives

Certification and approval marks	NYCE COLOMBIA, CE, EX
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/34/EU (ATEX), 2014/35/EU (LVD)
Reference Standards	EN 60079-0/A11:2013, EN 60079-0:2012, EN 60079-15:2010, EN 60079-31:2014, EN 60669-1/IS1:2009, EN 60669-1:1999, EN 60669-1:1999/A1:2002, EN 60669-1:1999/A2:2008, EN IEC 63000:2018

#### Atex characteristics

ATEX application zone	Zones 2-22
Dust Atex execution (Tmax1)	II 3D - Ex tc IIIC T70 °C Dc
Gas Atex execution (Tmax1)	II 3G - Ex nR IIC T6 Gc

The images are purely indicative. Palazzoli reserves the right to make changes without notice.