




**SERIES TAIS-MIGNON
TWO-WAY SWITCH
CODE 202276**

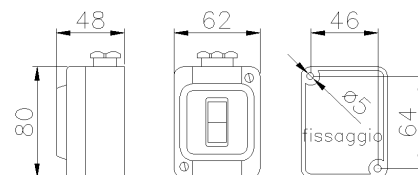

Datasheet

Electrical characteristics

Rated current	16/10A
Supply Voltage	250V~/400V~ 50/60Hz
Poles	1P
Rated insulation voltage	-
Insulation Class	II
CAM layout	-
Function Apparatus Control	Two way switches
Type of protection	None

Mechanical characteristics

Manufacturing material	Palazzoli Thermosetting GRP
Treatment type	-
Surface finishing	-
Color	Blue RAL 5015 (Cover), Grey RAL 7035 (Base)
Execution	Wall mounting
Dimensions	62X80X48 mm
Depth	-
Front-plate dimension	-
Hole type	M20
IP Protection degree	IP66/IP67
Additional IPdegree protection	-
Shock resistance	IK04 according to IEC/EN 62262
Resistance to Glow wire	960°C
Flame rating according UL94	V-0
Corrosivity category	-
Net Weight	0.22 KG
Working Environment Temp.	Min: -25°C ;Max: +70°C
Warehousing Temperature	Min: -50°C ;Max: +80°C

Technical data switch

Thermal current	16 A
Rated short-circuit current	-
Terminals type	Screw - indirect clamping
Conductors section (Cu)	Min: 1.5 mm ² ;Max: 4 mm ²
Terminal tightening torque	1 Nm
Auxiliary status contacts	-
Padlockable handle	-
Operating category	-

Reference Standards and Directives

Certification and approval marks	NYCE COLOMBIA, IMQ, RINA_ELE20321CS, UKCA, CE, CB IMQ
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60669-1:2018, EN 60669-1:2018/AC:2018-11, EN 60669-1:2018/AC:2020-02, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.