




**SERIES CAM-ST**  
**CMP\_INT**  
**CODE 211203**

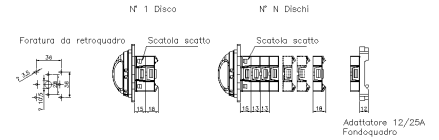

### Datasheet

#### Electrical characteristics

Rated current	20A
Supply Voltage	50V-500V~ 50/60Hz
Poles	3P
Rated insulation voltage	690 V
Insulation Class	-
CAM layout	2
Function Apparatus Control	One way switches
Type of protection	-

#### Mechanical characteristics

Manufacturing material	Technopolymer Recyclable Palazzoli
Treatment type	-
Surface finishing	-
Color	-
Execution	Blackplane
Dimensions	67X67X77 mm
Depth	46
Front-plate dimension	67x67
Hole type	-
IP Protection degree	IP20
Additional IPdegree protection	IP65 front plate
Shock resistance	-
Resistance to Glow wire	960°C
Flame rating according UL94	V-0
Corrosivity category	-
Net Weight	0.15 KG
Working Environment Temp.	Min: -25°C ;Max: +60°C
Warehousing Temperature	Min: -40°C ;Max: +80°C

#### Technical data switch

Thermal current	20 A
Rated short-circuit current	10 kA
Terminals type	Screw - indirect clamping
Conductors section (Cu)	Min: 1.5 mm <sup>2</sup> ;Max: 6 mm <sup>2</sup>
Terminal tightening torque	1,5 Nm
Auxiliary status contacts	-
Padlockable handle	4 locks Ø4 mm max
Operating category	

#### Reference Standards and Directives

Certification and approval marks	IMQ, CB IMQ, CE, UKCA
Directives	2014/35/EU (LVD)
Reference Standards	EN 60947-1:2007, EN 60947-1:2007/A1:2011, EN 60947-1:2007/A2:2014, EN 60947-3:2009, EN 60947-3:2009/A1:2012, EN 60947-3:2009/A2:2015

The images are purely indicative. Palazzoli reserves the right to make changes without notice.