




SERIES NAVE
CMP_INT
CODE 232627

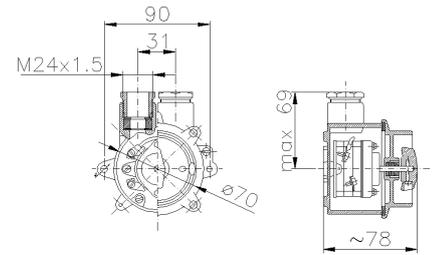

Datasheet

Electrical characteristics

Rated current	10A
Supply Voltage	250V 50/60Hz
Poles	2P
Rated insulation voltage	-
Insulation Class	I
CAM layout	-
Function Apparatus Control	One way switches
Type of protection	-

Mechanical characteristics

Manufacturing material	Brass
Treatment type	-
Surface finishing	-
Color	Grey RAL 7040
Execution	Wall mounting
Dimensions	110X90X109 mm
Depth	-
Front-plate dimension	-
Hole type	M24
IP Protection degree	IP66
Additional IPdegree protection	-
Shock resistance	-
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	-
Net Weight	0.91 KG
Working Environment Temp.	Min: -40°C ;Max: +70°C
Warehousing Temperature	Min: -50°C ;Max: +80°

Technical data switch

Thermal current	10 A
Rated short-circuit current	-
Terminals type	-
Conductors section (Cu)	Min: ;Max:
Terminal tightening torque	-
Auxiliary status contacts	-
Padlockable handle	-
Operating category	-

Reference Standards and Directives

Certification and approval marks	UKCA, CE
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE)
Reference Standards	EN 60669-1:2018, EN 60669-1:2018/AC:2018-11, EN 60669-1:2018/AC:2020-02, EN IEC 63000:2018, UNAV 2162:1985

The images are purely indicative. Palazzoli reserves the right to make changes without notice.