




**SERIES TAIS-MIGNON
PUSHBUTTON**

CODE 261413

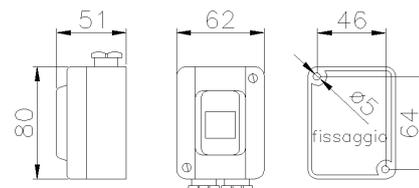

Datasheet

Electrical characteristics

| | |
|----------------------------|-----------------|
| Rated current | 10A |
| Supply Voltage | 400V 50/60Hz |
| Poles | 1NC |
| Rated insulation voltage | - |
| Insulation Class | II |
| CAM layout | - |
| Function Apparatus Control | Other functions |
| Type of protection | - |

Mechanical characteristics

| | |
|--------------------------------|---|
| Manufacturing material | Palazzoli Thermosetting GRP |
| Treatment type | - |
| Surface finishing | - |
| Color | Grey RAL 7035 (Base), Blue RAL 5015 (Cover) |
| Execution | Wall mounting |
| Dimensions | 62X80X51 mm |
| Depth | - |
| Front-plate dimension | - |
| Hole type | M16 (5 - 10 mm) |
| IP Protection degree | IP66/IP67 |
| Additional IPdegree protection | - |
| Shock resistance | IK04 according to IEC/EN 62262 |
| Resistance to Glow wire | 960°C |
| Flame rating according UL94 | V-0 |
| Corrosivity category | - |
| Net Weight | 0.19 KG |
| Working Environment Temp. | Min: -25°C ;Max: +70°C |
| Warehousing Temperature | Min: -50°C ;Max: +80°C |

Technical data switch

| | |
|-----------------------------|--|
| Thermal current | - |
| Rated short-circuit current | - |
| Terminals type | Screw - indirect clamping |
| Conductors section (Cu) | Min: 1 mm ² ;Max: 2.5 mm ² |
| Auxiliary status contacts | - |
| Padlockable handle | - |
| Operating category | - |

Reference Standards and Directives

| | |
|----------------------------------|--|
| Certification and approval marks | UKCA, IMQ, CB IMQ, RINA_ELE20321CS, CE |
| Directives | 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD) |
| Reference Standards | EN 60669-1:2018, EN 60669-1:2018/AC:2018-11, EN 60669-1:2018/AC:2020-02, EN IEC 63000:2018 |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.