




**SERIES TAIS-MIGNON  
PUSHBUTTON**

**CODE 261435**

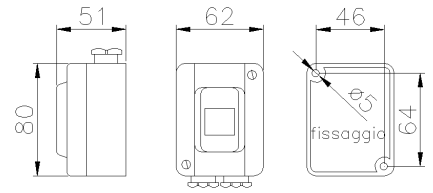

## Datasheet

### Electrical characteristics

|                            |                 |
|----------------------------|-----------------|
| Rated current              | 10A             |
| Supply Voltage             | 400V 50/60Hz    |
| Poles                      | 1NO             |
| Rated insulation voltage   | -               |
| Insulation Class           | II              |
| CAM layout                 | -               |
| Function Apparatus Control | Other functions |
| Type of protection         | -               |

### Mechanical characteristics

|                                |                                             |
|--------------------------------|---------------------------------------------|
| Manufacturing material         | Palazzoli Thermosetting GRP                 |
| Treatment type                 | -                                           |
| Surface finishing              | -                                           |
| Color                          | Blue RAL 5015 (Cover), Grey RAL 7035 (Base) |
| Execution                      | Wall mounting                               |
| Dimensions                     | 62X80X51 mm                                 |
| Depth                          | -                                           |
| Front-plate dimension          | -                                           |
| Hole type                      | M20                                         |
| IP Protection degree           | IP66/IP67                                   |
| Additional IPdegree protection | -                                           |
| Shock resistance               | IK04 according to IEC/EN 62262              |
| Resistance to Glow wire        | 960°C                                       |
| Flame rating according UL94    | V-0                                         |
| Corrosivity category           | -                                           |
| Net Weight                     | 0.19 KG                                     |
| Working Environment Temp.      | Min: -25°C ;Max: +70°C                      |
| Warehousing Temperature        | Min: -50°C ;Max: +80°C                      |

### Technical data switch

|                             |                                                  |
|-----------------------------|--------------------------------------------------|
| Thermal current             | -                                                |
| Rated short-circuit current | -                                                |
| Terminals type              | Screw - indirect clamping                        |
| Conductors section (Cu)     | Min: 1 mm <sup>2</sup> ;Max: 2.5 mm <sup>2</sup> |
| Auxiliary status contacts   | -                                                |
| Padlockable handle          | -                                                |
| Operating category          | -                                                |

### Reference Standards and Directives

|                                  |                                                                                            |
|----------------------------------|--------------------------------------------------------------------------------------------|
| Certification and approval marks | CB IMQ, UKCA, CE, RINA_ELE20321CS, IMQ                                                     |
| Directives                       | 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)                                     |
| Reference Standards              | EN 60669-1:2018, EN 60669-1:2018/AC:2018-11, EN 60669-1:2018/AC:2020-02, EN IEC 63000:2018 |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.