




**SERIES TAIS-MIGNON
FUSE**

CODE 302054

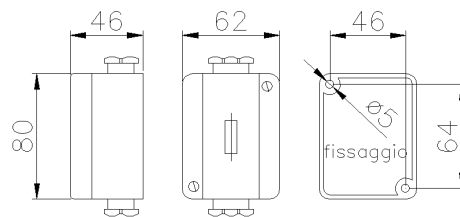

Datasheet

Electrical characteristics

| | |
|--------------------------|--------|
| Insulation Class | II |
| Rated insulation voltage | - |
| Rated operating voltage | 230V ● |
| Dissipable Power | - |

Mechanical characteristics

| | |
|--------------------------------|---|
| Manufacturing material | Palazzoli Thermosetting GRP |
| Treatment type | - |
| Surface finishing | - |
| Color | Grey RAL 7035 (Base), Blue RAL 5015 (Cover) |
| Execution | Wall mounting |
| Height Box | 36 mm |
| Cover height | 9 mm |
| Cover type | Blind |
| N. of modules on DIN rail | - |
| Hole type | M20 |
| Window type | |
| IP Protection degree | IP65 |
| Additional IPdegree protection | - |
| Shock resistance | IK04 according to IEC/EN 62262 |
| Resistance to Glow wire | 960°C |
| Flame rating according UL94 | V-0 |
| Corrosivity category | - |
| Working Environment Temp. | Min: -25°C ;Max: +70°C |
| Warehousing Temperature | Min: -50°C ;Max: +80°C |
| Dimensions | 62X80X46 mm |
| Internal dimensions | - |
| Net Weight | 0.23 KG |

Reference Standards and Directives

Certification and approval marks CE, UKCA, NYCE COLOMBIA

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)

Reference Standards EN 60269-1/A1:2009, EN 60269-1/A2:2014, EN 60269-1:2007, EN IEC 63000:2018, HD 60269-3:2010, HD 60269-3:2010/A1:2013

The images are purely indicative. Palazzoli reserves the right to make changes without notice.