




**SERIES ENERGY TAIS  
ENCLOSURE**

**CODE 500603**

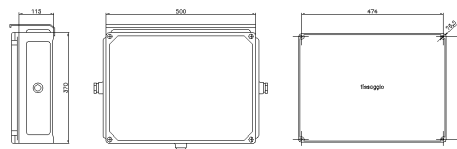

### Datasheet

#### Electrical characteristics

Insulation Class	II
Rated insulation voltage	-
Rated operating voltage	-
Dissipable Power	-

#### Mechanical characteristics

Manufacturing material	Palazzoli Thermosetting GRP
Treatment type	-
Surface finishing	-
Color	RAL 7042 (Base), Blue RAL 5015 (Cover)
Execution	Wall mounting
Height Box	117 mm
Cover height	25 mm
Cover type	Blind
N. of modules on DIN rail	-
Hole type	Pg48
Window type	-
IP Protection degree	IP65
Additional IPdegree protection	-
Shock resistance	IK10 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	-
Working Environment Temp.	Min: -25°C ;Max: +50°C
Warehousing Temperature	Min: -50°C ;Max: +80°C
Dimensions	370X500 mm
Internal dimensions	-
Net Weight	17.83 KG

#### Reference Standards and Directives

Certification and approval marks CE, UKCA

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/35/EU (LVD)

Reference Standards EN 61439-1:2011, EN 61439-4:2013, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.