




**SERIES TOP-TER
SOCKET OUTLET**
CODE 509336

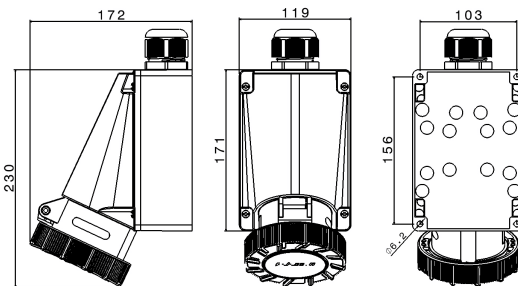

Datasheet

Electrical characteristics

| | |
|--------------------------|-------------------|
| Rated current | 63A |
| Supply Voltage | 400V 50/60Hz ● |
| Poles | 3P+ $\frac{1}{2}$ |
| Clock Position | 6h |
| Rated insulation voltage | 690 V |
| Signal plug inserted | 1 contact pilot |

Reference Standards and Directives

| | |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certification and approval marks | UKCA, NYCE COLOMBIA, CE |
| Directives | 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD) |
| Reference Standards | EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN IEC 63000:2018 |

Mechanical characteristics

| | |
|--------------------------------|-------------------------------------------------|
| Manufacturing material | Technopolymer Recyclable Palazzoli |
| Alveolus/plugs treatment | Nickel plated |
| Color | Grey RAL 7042 |
| Tightening diameter | 24÷28 mm |
| Execution | Wall mounting |
| IP Protection degree | IP67 |
| Additional IPdegree protection | - |
| Shock resistance | IK08 according to IEC/EN 62262 |
| Resistance to Glow wire | 850°C (Socket), 650°C (Box) |
| Flame rating according UL94 | V-2 (Socket), HB (Box) |
| Terminals type | Screw - indirect clamping |
| Conductors section (Cu) | Min: 4 mm ² ;Max: 25 mm ² |
| Terminal tightening torque | 2,5 Nm |
| Net Weight | 1 KG |
| Working Environment Temp. | Min: -25°C ;Max: +50°C |
| Warehousing Temperature | Min: -30°C ;Max: +70°C |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.