




**SERIES UNIBOX
ENCLOSURE**
CODE 520020NV



| Codice | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | L (mm) | M (mm) |
|--------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 520020 | 105.5 | 122 | 236 | 198 | 238 | 286 | 314 | 264 | 236 | 275 | 10 |
| 520021 | 132.5 | 150 | 286 | 248 | 333 | 381 | 410 | 315 | 283 | 367 | 10 |

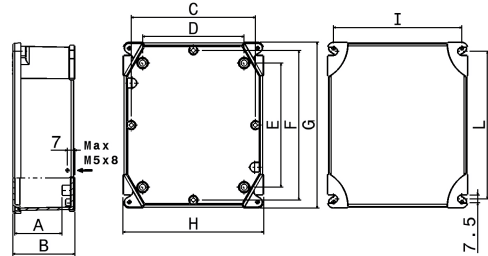

Datasheet

Electrical characteristics

| | |
|--------------------------|-----|
| Insulation Class | I |
| Rated insulation voltage | - |
| Rated operating voltage | - |
| Dissipable Power | 62W |

Mechanical characteristics

| | |
|--------------------------------|--------------------------------|
| Manufacturing material | Aluminum alloy |
| Treatment type | Fluorozirconic passivation |
| Surface finishing | - |
| Color | - |
| Execution | Wall mounting |
| Height Box | 115.5 mm |
| Cover height | 12 mm |
| Cover type | Blind |
| N. of modules on DIN rail | - |
| Hole type | - |
| Window type | - |
| IP Protection degree | IP66/IP67 |
| Additional IPdegree protection | - |
| Shock resistance | IK08 according to IEC/EN 62262 |
| Resistance to Glow wire | - |
| Flame rating according UL94 | - |
| Corrosivity category | C4 (ISO 12944) |
| Working Environment Temp. | Min: -40°C ;Max: +90°C |
| Warehousing Temperature | Min: -50°C ;Max: +90°C |
| Dimensions | 264X314X122 mm |
| Internal dimensions | 243X295X104 mm |
| Net Weight | 2.6 KG |

Reference Standards and Directives

Certification and approval marks IMQ, NYCE COLOMBIA, CB IMQ, UKCA, CE

Directives 2014/35/EU (LVD)

Reference Standards EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN 62208:2011

The images are purely indicative. Palazzoli reserves the right to make changes without notice.