




**SERIES UNIBOX  
ENCLOSURE**  
**CODE 520021**



Codice	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
520020	105.5	122	236	198	238	286	314	264	236	275	10
520021	132.5	150	286	248	333	381	410	315	283	367	10

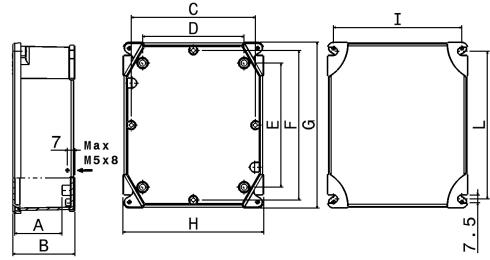

## Datasheet

### Electrical characteristics

Insulation Class	I
Rated insulation voltage	-
Rated operating voltage	-
Dissipable Power	95W

### Mechanical characteristics

Manufacturing material	Aluminum alloy
Treatment type	Fluorozirconic passivation
Surface finishing	Painted grey RAL 7042
Color	Grey RAL 7042
Execution	Wall mounting
Height Box	143.5 mm
Cover height	12 mm
Cover type	Blind
N. of modules on DIN rail	-
Hole type	-
Window type	-
IP Protection degree	IP66/IP67
Additional IPdegree protection	-
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	C4 (ISO 12944)
Working Environment Temp.	Min: -40°C ;Max: +90°C
Warehousing Temperature	Min: -50°C ;Max: +90°C
Dimensions	315X410X150 mm
Internal dimensions	291X386X126 mm
Net Weight	4.22 KG

### Reference Standards and Directives

Certification and approval marks CB IMQ, UKCA, CE, NYCE COLOMBIA, IMQ

Directives 2014/35/EU (LVD)

Reference Standards EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN 62208:2011

The images are purely indicative. Palazzoli reserves the right to make changes without notice.