




**SERIES UNIBOX  
ENCLOSURE**  
**CODE 520021NV**



Codice	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
520020	105.5	122	236	198	238	286	314	264	236	275	10
520021	132.5	150	286	248	333	381	410	315	283	367	10

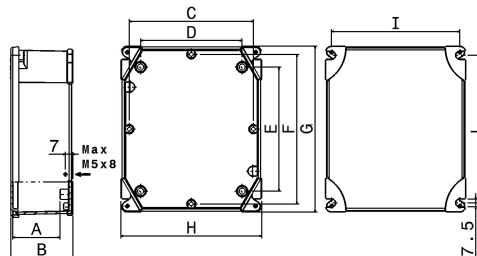

## Datasheet

### Electrical characteristics

Insulation Class	I
Rated insulation voltage	-
Rated operating voltage	-
Dissipable Power	95W

### Mechanical characteristics

Manufacturing material	Aluminum alloy
Treatment type	Fluorozirconic passivation
Surface finishing	-
Color	-
Execution	Wall mounting
Height Box	143.5 mm
Cover height	12 mm
Cover type	Blind
N. of modules on DIN rail	-
Hole type	-
Window type	-
IP Protection degree	IP66/IP67
Additional IPdegree protection	-
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	C4 (ISO 12944)
Working Environment Temp.	Min: -40°C ;Max: +90°C
Warehousing Temperature	Min: -50°C ;Max: +90°C
Dimensions	315X410X150 mm
Internal dimensions	291X386X126 mm
Net Weight	4.22 KG

### Reference Standards and Directives

Certification and approval marks CB IMQ, CE, IMQ, NYCE COLOMBIA, UKCA

Directives 2014/35/EU (LVD)

Reference Standards EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN 62208:2011

The images are purely indicative. Palazzoli reserves the right to make changes without notice.