
TAIS MIGNON WALL-MOUNTING ENCLOSURE 2MODULES FOR SOCKET-OUTLETS

SERIES TAIS-MIGNON ENCLOSURE

CODE 559232



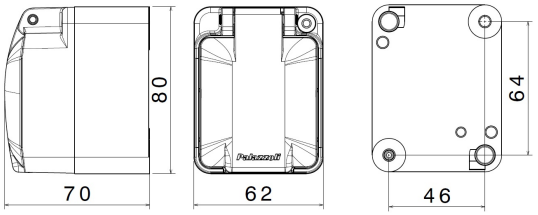

Datasheet

Electrical characteristics

Insulation Class	II
Rated insulation voltage	-
Rated operating voltage	-
Dissipable Power	2,8W

Mechanical characteristics

Manufacturing material	Palazzoli Thermosetting GRP
Treatment type	-
Surface finishing	-
Color	Blue RAL 5015 (Cover), Grey RAL 7035 (Base)
Execution	Wall mounting
Height Box	36 mm
Cover height	34 mm
Cover type	Blind
N. of modules on DIN rail	-
Hole type	M20
Window type	
IP Protection degree	IP44
Additional IPdegree protection	-
Shock resistance	IK07 according to IEC/EN 62262
Resistance to Glow wire	960°C
Flame rating according UL94	V-0
Corrosivity category	-
Working Environment Temp.	Min: -25°C ;Max: +70°C
Warehousing Temperature	Min: -50°C ;Max: +80°C
Dimensions	62X80X70 mm
Flush-mounting dimensions	-
Internal dimensions	-
Net Weight	0.15 KG

Reference Standards and Directives

Certification and approval marks	IMQ, CE, UKCA, CB IMQ
Directives	2014/35/EU (LVD)
Reference Standards	EN IEC 60670-1:2021, EN IEC 60670 -1:2021/A11:2021

The images are purely indicative. Palazzoli reserves the right to make changes without notice.

Palazzoli S.p.A. - Società unipersonale - Via F. Palazzoli, 31 - 25128 Brescia - Italy - tel. +39 030 2015.1 - fax +39 030 2015.258 - www.palazzoli.com - export@palazzoli.it