




**SERIES TOP-TER**  
**CMP\_CASS**  
**CODE 579703**

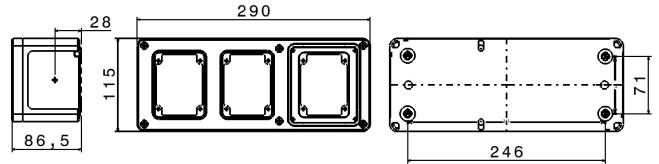

## Datasheet

### Electrical characteristics

Insulation Class	II
Rated insulation voltage	690 V

### Reference Standards and Directives

Certification and approval marks	CE, NYCE COLOMBIA, UKCA
Directives	2014/35/EU (LVD)
Reference Standards	EN 62208:2011

### Mechanical characteristics

Manufacturing material	Technopolymer Recyclable Palazzoli
Color	Grey RAL 7035
Execution	Wall mounting
Door type	-
Number and type of closures	-
N. of modules on DIN rail	-
IP Protection degree	IP55
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	650°C
Flame rating according UL94	HB
Corrosivity category	-
Working Environment Temp.	Min: -25 °C ;Max: +50 °C
Warehousing Temperature	Min: -30 °C ;Max: +70 °C
Dimensions	115X86,5X290 mm
Internal dimensions	-
Net Weight	0.47 KG
Maximum permissible load	On the doors: 0 kg; On the bottom: 0 kg; Mounting surfaces: 10 kg

The images are purely indicative. Palazzoli reserves the right to make changes without notice.