




**SERIES JANUS
EMPTY DISTRIBUTION BOARD**
CODE 634100

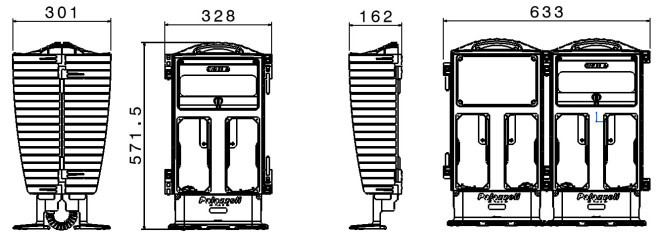

Datasheet

Electrical characteristics

Insulation Class	II
Rated insulation voltage	500 V
Dissipable Power	-

Reference Standards and Directives

Certification and approval marks CE, NYCE COLOMBIA, UKCA

Directives 2014/35/EU (LVD)

Reference Standards EN 62208:2011

Mechanical characteristics

Manufacturing material	Technopolymer Recyclable Palazzoli
Color	Blue RAL 5015
Execution	Portable
Door type	-
Number and type of closures	1 rotary lever closure
N. of modules on DIN rail	12
IP Protection degree	IP65
Shock resistance	IK10 according to IEC/EN 62262
Resistance to Glow wire	650°C
Flame rating according UL94	-
Corrosivity category	-
Working Environment Temp.	Min: -20°C ;Max: +40°C
Warehousing Temperature	Min: -30°C ;Max: +70°C
Dimensions	329X572X325 mm
Internal dimensions	-
Net Weight	5.9 KG
Maximum permissible load	On the bottom: 0 kg; On the doors: 0 kg; Mounting surfaces: 10 kg

The images are purely indicative. Palazzoli reserves the right to make changes without notice.