




**SERIES X-CEE**  
**SOCKET OUTLET**  
**CODE 776244**

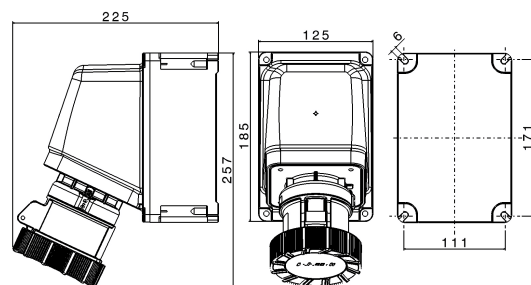

### Datasheet

#### Electrical characteristics

|                          |                                                    |
|--------------------------|----------------------------------------------------|
| Rated current            | 32A                                                |
| Supply Voltage           | 110V 50/60Hz <span style="color: yellow;">●</span> |
| Poles                    | 3P+N+ $\perp$                                      |
| Clock Position           | 4h                                                 |
| Rated insulation voltage | 690 V                                              |
| Signal plug inserted     | -                                                  |

#### Reference Standards and Directives

|                                  |                                                                                                                                                                                    |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certification and approval marks | UKCA, CE, NYCE COLOMBIA                                                                                                                                                            |
| Directives                       | 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)                                                                                                                             |
| Reference Standards              | EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN IEC 63000:2018 |

#### Mechanical characteristics

|                                |                                                            |
|--------------------------------|------------------------------------------------------------|
| Manufacturing material         | Palazzoli Thermosetting GRP, High resistance technopolymer |
| Alveolus/plugs treatment       | Nickel plated                                              |
| Color                          | Blue RAL 5015, Grey RAL 7046                               |
| Tightening diameter            | -                                                          |
| Execution                      | Wall mounting                                              |
| IP Protection degree           | IP66/IP67                                                  |
| Additional IPdegree protection | IP68/IP69 - IEC 60529                                      |
| Shock resistance               | IK10 according to IEC/EN 62262                             |
| Resistance to Glow wire        | 850°C (Casing), 960°C (Live contacts)                      |
| Flame rating according UL94    | V-2 (Casing), V-0 (Live contacts)                          |
| Terminals type                 | Screw - indirect clamping                                  |
| Conductors section (Cu)        | Min: 1 mm <sup>2</sup> ;Max: 10 mm <sup>2</sup>            |
| Terminal tightening torque     | 2 Nm                                                       |
| Net Weight                     | 1.25 KG                                                    |
| Working Environment Temp.      | Min: -40°C ;Max: +60°C                                     |
| Warehousing Temperature        | Min: -50°C ;Max: +90°C                                     |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.