
X-CEE 65° ANGLED WALL MOUNTING SOCKET OUTLET 125A 3P+E 500V 7H IP66/67/68/69

SERIES X-CEE SOCKET OUTLET

CODE 776437



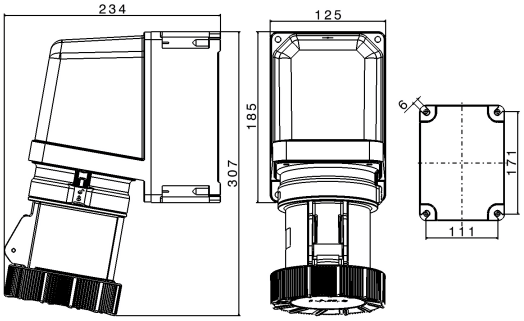

Datasheet

Electrical characteristics

Rated current	125A
Supply Voltage	500V 50/60Hz ●
Poles	3P+ ⏚
Clock Position	7h
Rated insulation voltage	1000 V
Signal plug inserted	1 contact pilot

Reference Standards and Directives

Certification and approval marks	CE, UKCA, NYCE COLOMBIA
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309 -1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309 -2:1999/A2:2012, EN IEC 63000:2018

Mechanical characteristics

Manufacturing material	High resistance technopolymer, Palazzoli Thermosetting GRP
Alveolus/plugs treatment	Nickel plated
Color	Blue RAL 5015, Grey RAL 7046
Tightening diameter	-
Execution	Wall mounting
IP Protection degree	IP66/IP67
Additional IPdegree protection	IP68/IP69 - IEC 60529
Shock resistance	IK10 according to IEC/EN 62262
Resistance to Glow wire	850°C (Casing), 960°C (Live contacts)
Flame rating according UL94	V-0 (Live contacts), V-2 (Casing)
Terminals type	Screw - indirect clamping
Conductors section (Cu)	Min: 16 mm² ;Max:
Terminal tightening torque	12 Nm
Net Weight	2.22 KG
Working Environment Temp.	Min: -40°C ;Max: +60°C
Warehousing Temperature	Min: -50°C ;Max: +90°C

The images are purely indicative. Palazzoli reserves the right to make changes without notice.

Palazzoli S.p.A. - Società unipersonale - Via F. Palazzoli, 31 - 25128 Brescia - Italy - tel. +39 030 2015.1 - fax +39 030 2015.258 - www.palazzoli.com - export@palazzoli.it