




**SERIES X-CEE**  
**SOCKET OUTLET**  
**CODE 776439**

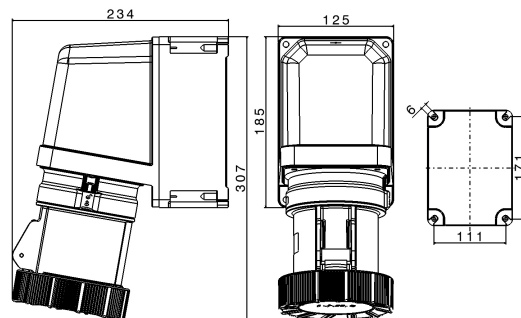

### Datasheet

#### Electrical characteristics

|                          |                 |
|--------------------------|-----------------|
| Rated current            | 125A            |
| Supply Voltage           | 230V 50/60Hz ●  |
| Poles                    | 3P+ $\perp$     |
| Clock Position           | 9h              |
| Rated insulation voltage | 1000 V          |
| Signal plug inserted     | 1 contact pilot |

#### Reference Standards and Directives

|                                  |                                                                                                                                                                                    |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certification and approval marks | NYCE COLOMBIA, CE, UKCA                                                                                                                                                            |
| Directives                       | 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)                                                                                                                             |
| Reference Standards              | EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN IEC 63000:2018 |

#### Mechanical characteristics

|                                |                                                            |
|--------------------------------|------------------------------------------------------------|
| Manufacturing material         | Palazzoli Thermosetting GRP, High resistance technopolymer |
| Alveolus/plugs treatment       | Nickel plated                                              |
| Color                          | Grey RAL 7046, Blue RAL 5015                               |
| Tightening diameter            | -                                                          |
| Execution                      | Wall mounting                                              |
| IP Protection degree           | IP66/IP67                                                  |
| Additional IPdegree protection | IP68/IP69 - IEC 60529                                      |
| Shock resistance               | IK10 according to IEC/EN 62262                             |
| Resistance to Glow wire        | 850°C (Casing), 960°C (Live contacts)                      |
| Flame rating according UL94    | V-0 (Live contacts), V-2 (Casing)                          |
| Terminals type                 | Screw - indirect clamping                                  |
| Conductors section (Cu)        | Min: 16 mm <sup>2</sup> ;Max: 70 mm <sup>2</sup>           |
| Terminal tightening torque     | 12 Nm                                                      |
| Net Weight                     | 2.22 KG                                                    |
| Working Environment Temp.      | Min: -40°C ;Max: +60°C                                     |
| Warehousing Temperature        | Min: -50°C ;Max: +90°C                                     |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.