



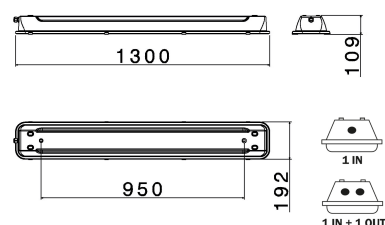

SERIES RINO LED-EX LINEAR FIXTURE

CODE **820392EX**



Model Code : RINOLED-EX RL-Z2-EXN0-13-TGL-304-3555-096-00-80-40-500-NBD-PL20-1011-000

Datasheet

Lighting characteristics

Output flux	6,500 lm
Luminous flux (TJ=25°C)	8,200 lm
Luminaire power	52 W
Output efficiency	125 lm/W
Color temperature	4000K
Optics type	Anti aging and UV resistant PMMA Lenses with efficiency>90% and transparency >95%
Optics	Simmetrica concentrante comfort 30°X90°
CRI	>80
Color shift	3 MacAdam Step
Photobiological risk EN 62471	RG0 - Exempt Group
UGR index	<22
Flicker free	< 1%
Life time	L80/B10 @50.000h Tq=25°C
Emergency function	-
Emergency flux	-

Electrical characteristics

Insulation Class	I
Supply Voltage	220-240V~ - 180-240Vdc 0/50/60Hz
Control system/dimming	Standard on-off
Surge protection	8kV common mode 6kV differential mode
Power factor	>0,95
Hole type	Terminal block with cable gland M20
Conductors section (Cu)	Min: 1 ;Max: 2.5 mm ²
Tightening diameter	Min 10 mm; Max 14 mm

Equipment Included 2 ATEX M20 caps, pair of stainless steel AISI 304 hooks (code 820011) power supply connector, Cable gland ATEX M20

Mechanical characteristics

Manufacturing material	Stainless steel AISI 304
Treatment type	Natural finishing
Surface finishing	-
Colour	-
Diffuser type	Extraclear tempered glass 5 mm
IP Protection degree	IP65
Additional IPdegree protection	IP66 (ONLY FOR IEC 60598-1)
Shock resistance	7J Body / 4J Glass (IEC 60079-0)
Corrosivity category	Equivalent to C5-H (ISO 12944)
Mounting system	Pair of steel hooks
Net Weight	6.2 KG
Working Environment Temp.	Tmin: -35°C ; Tmax1: +55°C ; Tmax2: +40°C
Warehousing Temperature	Tmin: -40°C ; Tmax: +75°C

Atex characteristics

ATEX application zone	Zones 2-21-22
Dust Atex execution (Tmax1)	II 2D - Ex tb IIIC T85°C Db
Gas Atex execution (Tmax1)	II 3G - Ex ec mc IIC T4 Gc
Dust Atex execution (Tmax2)	II 2D - Ex tb IIIC T85°C Db
Gas Atex execution (Tmax2)	II 3G - Ex ec mc IIC T5 Gc
Atex execution MINES	-

Reference Standards and Directives

Warranty	2 years extendable to 7
Certification and approval marks	IECEx, EX, CE
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/34/EU (ATEX)
Reference Standards	EN 60079-18:2015, EN 60079-18:2015/A1:2017, EN 60079-31:2014, EN 60079-7:2015, EN 60079-7:2015/A1:2018, EN 60598-2-24:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN IEC 55015:2019, EN IEC 55015:2019/A11:2020, EN IEC 60079-0:2018, EN IEC 60598-1:2021, EN IEC 60598-2-1:2021, EN IEC 60598-2-22:2022, EN IEC 63000:2018

The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.