





**SERIES RINO LED-EX
HIGH BAY**
CODE 821773EX

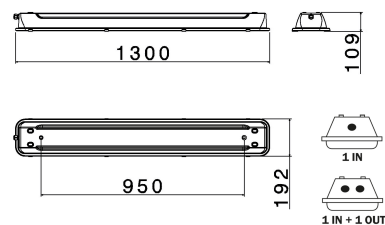

Model Code : RINOLED-EX RL-Z1-EXE3-13-TGL-304-0045-0384-00-80-40-600-000-PL20-1011-000



Datasheet

Lighting characteristics

Output flux	12,353 lm
Luminous flux (TJ=25°C)	14,800 lm
Luminaire power	86 W
Output efficiency	144 lm/W
Color temperature	4000K
Optics type	Silicon resin anti aging and UV resistance with efficiency > 95%
Optics	Symmetrical wide 110°
CRI	>80
Color shift	4 MacAdam Step
Photobiological risk EN 62471	RG0 - Exempt Group
UGR index	-
Flicker free	< 1%
Life time	L80 B10 @90.000h Tq=25°C
Emergency function	Internal battery duration 3h recharge 24h
Emergency flux	400 lm

Electrical characteristics

Insulation Class	I
Supply Voltage	220V-240V 50/60Hz
Control system/dimming	Standard on-off
Surge protection	8kV common mode 6kV differential mode
Power factor	>0,95
Hole type	Terminal block with cable gland M20
Conductors section (Cu)	Min: 1 ;Max: 2.5 mm ²
Tightening diameter	Min 10 mm; Max 14 mm

Equipment Included 2 ATEX M20 caps, Cable gland ATEX M20, Pair of stainless steel eyebol

Mechanical characteristics

Manufacturing material	Stainless steel AISI 304
Treatment type	Natural finishing
Surface finishing	-
Colour	-
Diffuser type	Extraclear tempered glass 5 mm
IP Protection degree	IP65
Additional IPdegree protection	IP66 (ONLY FOR IEC 60598-1)
Shock resistance	7J Body / 4J Glass (IEC 60079-0)
Corrosivity category	Equivalent to C5-H (ISO 12944)
Mounting system	Pair of steel hooks
Net Weight	7.8 KG
Working Environment Temp.	Tmin: 0°C ; Tmax1: +45°C ; Tmax2: +35°C
Warehousing Temperature	Tmin: 0°C ; Tmax: +75 °C

Atex characteristics

ATEX application zone	Zones 1-2-21-22
Dust Atex execution (Tmax1)	II 2D - Ex tb IIIC T85°C Db
Gas Atex execution (Tmax1)	II 2G - Ex eb mb IIC T5 Gb
Dust Atex execution (Tmax2)	II 2D - Ex tb IIIC T85°C Db
Gas Atex execution (Tmax2)	II 2G - Ex eb mb IIC T6 Gb
Atex execution MINES	I M1 - Ex eb mb I Mb

Reference Standards and Directives

Warranty	2 years extendable to 7
Certification and approval marks	EX, IECEx, CE
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/34/EU (ATEX)
Reference Standards	EN 60079-18:2015, EN 60079-18:2015/A1:2017, EN 60079-31:2014, EN 60079-7:2015, EN 60079-7:2015/A1:2018, EN 60598-2-24:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN IEC 55015:2019, EN IEC 55015:2019/A11:2020, EN IEC 60079-0:2018, EN IEC 60598-1:2021, EN IEC 60598-2-22:2022, EN IEC 63000:2018

The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.