





**SERIES RINO LED  
FIXTURE  
CODE 822482**

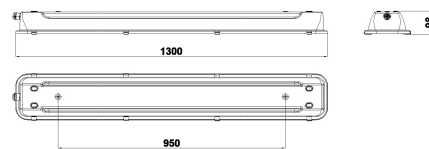

Model Code : RINOLED RL-IN1-13-TGL-304-45-144-00-80-40-450-000-000



### Datasheet

#### Lighting characteristics

Output flux	8,946 lm
Luminous flux (TJ=25°C)	11,000 lm
Luminaire power	63 W
Output efficiency	142 lm/W
Color temperature	4000K
Optics type	White reflector RAL9016
Optics	Symmetrical wide 110°
CRI	>80
Color shift	3 MacAdam Step
Photobiological risk EN 62471	RG0 - Exempt Group
UGR index	-
Flicker free	< 3%
Life time	L80/B10 @50.000h Tq=25°C
Emergency function	-
Emergency flux	-

#### Electrical characteristics

Insulation Class	I
Supply Voltage	220-240V 50/60Hz AC/DC 0/50/60Hz
Control system/dimming	Standard on-off
Surge protection	2kV common mode/differential mode
Power factor	>0,95
Hole type	3 poles connector
Tightening diameter	Min 7 mm; Max 13 mm
Equipment Included	pair of stainless steel AISI 304 hooks (code 820011) power supply connector

#### Mechanical characteristics

Manufacturing material	Stainless steel AISI 304
Treatment type	Natural finishing
Surface finishing	-
Colour	-
Diffuser type	Extraclear tempered glass 4 mm
IP Protection degree	IP66
Shock resistance	IK09 according to IEC/EN 62262
Corrosivity category	Equivalent to C5-H (ISO 12944)
Mounting system	Coppia golfari inox
Net Weight	6.5 KG
Working Environment Temp.	Min: -30°C ;Max: +45°C
Warehousing Temperature	Min: -40°C ;Max: +70°C

#### Reference Standards and Directives

Warranty	2 years extendable to 7
Certification and approval marks	ENEC 05, UKCA, CE
Directives	2009/125/EC (ERP), 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/35/EU (LVD), Reg. EU 2019/2020 (EcoDesign)
Reference Standards	EN 55015:2013, EN 60598-1:2015, EN 60598-1:2015/A1:2018, EN 60598-1:2015/AC:2015, EN 60598-1:2015/AC:2016, EN 60598-1:2015/AC:2017, EN 60598-2-1:1989, EN 60598-2-22:2014, EN 60598-2-22:2014/A1:2020, EN 60598-2-22:2014/AC:2015, EN 60598-2-22:2014/AC:2016-05, EN 60598-2-22:2014/AC:2016-09, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN 62311:2008, EN 62471:2008, EN 62493:2015, EN IEC 63000:2018, IEC TR 62778:2014

The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.