



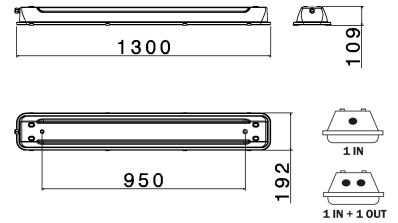

**SERIES RINO LED-EX  
LINEAR FIXTURE  
CODE 841492EX**



Model Code : RINOLED-EX RL-Z2-EXN0-13-TGL-PGS-3555-144-00-80-40-500-WBC-PL20-1011-000

### Datasheet

#### Lighting characteristics

Output flux	10,050 lm
Luminous flux (TJ=25°C)	12,260 lm
Luminaire power	75 W
Output efficiency	134 lm/W
Color temperature	4000K
Optics type	Anti aging and UV resistant PMMA Lenses with efficiency >90% and transparency >95%
Optics	Symmetrical wide comfort 88°
CRI	>80
Color shift	3 MacAdam Step
Photobiological risk EN 62471	RG0 - Exempt Group
UGR index	<22
Flicker free	< 1%
Life time	L80/B10 @50.000h Tq=25°C
Emergency function	-
Emergency flux	-

#### Electrical characteristics

Insulation Class	I
Supply Voltage	220-240V~ - 180-240Vdc 0/50/60Hz
Control system/dimming	Standard on-off
Surge protection	8kV common mode 6kV differential mode
Power factor	>0,95
Hole type	Terminal block with cable gland M20
Conductors section (Cu)	Min: 1 ;Max: 2.5 mm <sup>2</sup>
Tightening diameter	Min 10 mm; Max 14 mm
Equipment Included	Pair of stainless steel eyebol, 2 ATEX M20 caps, Cable gland ATEX M20

#### Mechanical characteristics

Manufacturing material	Galvanized and painted steel
Treatment type	Natural finishing
Surface finishing	-
Colour	-
Diffuser type	Extraclear tempered glass 5 mm
IP Protection degree	IP65
Additional IPdegree protection	IP66 (ONLY FOR IEC 60598-1)
Shock resistance	7J Body / 4J Glass (IEC 60079-0)
Corrosivity category	C5(M)/C4(H) (ISO 12944)
Mounting system	Pair of steel hooks
Net Weight	7.96 KG
Working Environment Temp.	Tmin: -35°C ; Tmax1: +55°C ; Tmax2: +40°C
Warehousing Temperature	Tmin: -40°C ; Tmax: +75°C

#### Atex characteristics

ATEX application zone	Zones 2-21-22
Dust Atex execution (Tmax1)	II 2D - Ex tb IIIC T85°C Db
Gas Atex execution (Tmax1)	II 3G - Ex ec mc IIC T4 Gc
Dust Atex execution (Tmax2)	II 2D - Ex tb IIIC T85°C Db
Gas Atex execution (Tmax2)	II 3G - Ex ec mc IIC T5 Gc
Atex execution MINES	-

#### Reference Standards and Directives

Warranty	2 years extendable to 7
Certification and approval marks	EX, CE, IECEx
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/34/EU (ATEX)
Reference Standards	EN 60079-18:2015, EN 60079-18:2015/A1:2017, EN 60079-31:2014, EN 60079-7:2015, EN 60079-7:2015/A1:2018, EN 60598-2-24:2013, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN IEC 55015:2019, EN IEC 55015:2019/A11:2020, EN IEC 60079-0:2018, EN IEC 60598-1:2021, EN IEC 60598-2-1:2021, EN IEC 60598-2-22:2022, EN IEC 63000:2018

The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.