

RINO-LED PAINTED STEEL-GLASS LIGHTING FIXTURE L1300MM 4800LM WIDE BEAM

SERIES RINO LED FIXTURE

CODE 842242





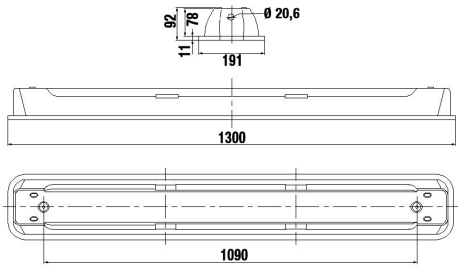

CE

Datasheet

Specifications

Net Weight	6.036 KG
Photometric (JPEG/PNG)	9-simmetrica diffondente.jpg
Photometric curve (format .LDT	842242.LDT
Frequency	0/50/60Hz
IP Protection degree	IP66
Rated operating voltage	220V-240V
Manufacturing material	Galvanized and painted steel
Power on label (lighting)	48 W
Luminaire power	48 W
Insulation Class	I
Light source type	LED
Dimensions	1300X200X100 mm
Hole type	M20
Optics type	WHITE PAINTED REFLECTOR
Diffuser type	SATIN TEMPERED GLASS
Color temperature	4000K
Power Supply Unit	Electronic
Luminous flux (TJ=25°C)	5,900 lm
Min. Amb. Temp.	-20°C
Max. Amb. Temp.	+40°C

Reference Standards and Directives

Certification and approval marks	CE
Directives	2009/125/EC (ERP), 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/35/EU (LVD)
Reference Standards	EN 55015:2013, EN 60598-1:2015, EN 60598 -1:2015/A1:2018, EN 60598-1:2015/AC:2015, EN 60598-1:2015/AC:2016, EN 60598 -1:2015/AC:2017, EN 60598-2-1:1989, EN 60598-2-22:2014, EN 60598-2 -22:2014/AC:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN 62311:2008, EN 62471:2008, EN 62493:2015, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.

Palazzoli S.p.A. - Società unipersonale - Via F. Palazzoli, 31 - 25128 Brescia - Italy - tel. +39 030 2015.1 - fax +39 030 2015.258 - www.palazzoli.com - export@palazzoli.it