



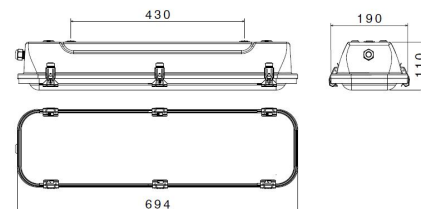

**SERIES RINO-NAVE**  
**LINEAR FIXTURE**  
**CODE 879062**



### Datasheet

#### Lighting characteristics

|                    |                |
|--------------------|----------------|
| Lamp power         | 2x14W          |
| Optics type        | -              |
| Optics             | Symmetric wide |
| Emergency function | -              |

#### Mechanical characteristics

|                           |                                                  |
|---------------------------|--------------------------------------------------|
| Manufacturing material    | Stainless steel AISI 316L                        |
| Treatment type            | -                                                |
| Surface finishing         | Atoxic, anti UV polyester paint oven polymerized |
| Colour                    | WHITE RAL 9016                                   |
| Diffuser type             | OPALINE POLYCARBONATE                            |
| IP Protection degree      | IP66/IP67                                        |
| Shock resistance          | IK09 according to IEC/EN 62262                   |
| Corrosivity category      | C5 (ISO 12944)                                   |
| Net Weight                | 3.21 KG                                          |
| Working Environment Temp. | Min: -25°C ;Max: +50°C                           |
| Warehousing Temperature   | Min: -40°C ;Max: +70°C                           |

#### Electrical characteristics

|                        |                                     |
|------------------------|-------------------------------------|
| Insulation Class       | I                                   |
| Supply Voltage         | 180V-260V 0/50/60Hz                 |
| Control system/dimming | Standard on-off                     |
| Power Supply Unit      | Electronic                          |
| Lampholder type        | G5                                  |
| Light source type      | T5                                  |
| Hole type              | Terminal block with cable gland M20 |
| Max conductor section  | 2.5 mm <sup>2</sup>                 |
| Tightening diameter    | Min 7 mm; Max 15 mm                 |

#### Reference Standards and Directives

|                                  |                                                                                                                                                                                                                                                             |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certification and approval marks | RINA_ELE144918CS, CE, UKCA                                                                                                                                                                                                                                  |
| Directives                       | 2009/125/EC (ERP), 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/35/EU (LVD), Reg. EU 2019/2020 (EcoDesign)                                                                                                                                  |
| Reference Standards              | EN 55015:2013, EN 60598-1:2015, EN 60598-1:2015/A1:2018, EN 60598-1:2015/AC:2015, EN 60598-1:2015/AC:2016, EN 60598-1:2015/AC:2017, EN 60598-2-1:1989, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN 62311:2008, EN 62493:2015, EN IEC 63000:2018 |

Equipment Included -

The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.