



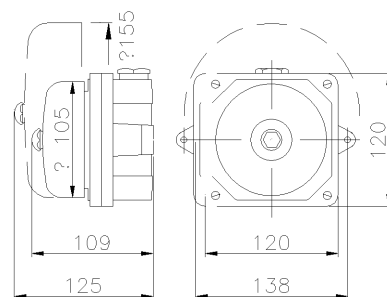

**SERIES ALARM-Ex
BELL**
CODE 900263EX



Datasheet

Specifications

Net Weight	1.326 KG
Rated current	0.15A
Frequency	50/60Hz
IP Protection degree	IP55
Poles	2P+ $\frac{1}{2}$
Rated operating voltage	110V ●
Manufacturing material	Aluminum alloy
power	13VA initial 11VA vibratingVA
Hole type	M20
Sound level at 1 mt.	101dB dB
Acoustic Signal Type	D - continuous sound according to manual control
Operational working temp	-20 T 40 °C

Reference Standards and Directives

Certification and approval marks CE, EX, NYCE COLOMBIA

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/34/EU (ATEX), 2014/35/EU (LVD)

Reference Standards EN 60079-0/A11:2013, EN 60079-0:2012, EN 60079-15:2010, EN 60079-31:2014, EN 62080:2009, EN IEC 63000:2018

Atex characteristics

ATEX application zone	Zones 2-22
Dust Atex execution (Tmax1)	II 3D - Ex tc IIIC T65 °C Dc
Gas Atex execution (Tmax1)	II 3G - Ex nA IIC T3 Gc

The images are purely indicative. Palazzoli reserves the right to make changes without notice.