




**SERIES CAM-ST  
REVERSING SWITCH  
CODE 223403**

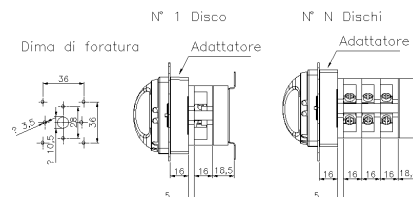

### Datasheet

#### Electrical characteristics

Rated current	40A
Supply Voltage	50V-500V~ 50/60Hz
Poles	3P
Rated insulation voltage	690 V
Insulation Class	-
CAM layout	12
Function Apparatus Control	Reversing switches
Type of protection	-

#### Mechanical characteristics

Manufacturing material	Technopolymer Recyclable Palazzoli
Treatment type	-
Surface finishing	-
Color	Grey RAL 7035
Execution	Blackplane
Dimensions	67X67X107 mm
Depth	77
Front-plate dimension	67x67
Hole type	-
IP Protection degree	IP20
Additional IPdegree protection	IP65 front plate
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	960°C
Flame rating according UL94	V-0
Corrosivity category	-
Net Weight	0.36 KG
Working Environment Temp.	Min: -25°C ;Max: +60°C
Warehousing Temperature	Min: -40°C ;Max: +80°C

#### Technical data switch

Thermal current	40 A
Rated short-circuit current	10 kA
Terminals type	Screw - indirect clamping
Conductors section (Cu)	Min: 2.5 mm <sup>2</sup> ;Max: 16 mm <sup>2</sup>
Terminal tightening torque	3 Nm
Auxiliary status contacts	-
Padlockable handle	4 locks Ø4 mm max

#### Operating category

Categoria Rating	Tensione Voltage	Corrente / Potenza Current / Power
AC-22A	230 V	40 A
	400 V	40 A
	500 V	40 A
AC-23A	690 V	40 A
	230 V	40 A
	400 V	40 A
	500 V	32 A
AC-23A	600 V	32 A
	230 V	12.7 kW
	400 V	22.2 kW
	500 V	22.2 kW
AC-3	600 V	26.6 kW
	230 V	11.2 kW
	400 V	19.4 kW
	500 V	22.2 kW
	600 V	30.6 kW

#### Reference Standards and Directives

Certification and approval marks UKCA, CE

Directives 2014/35/EU (LVD)

Reference Standards EN 60947-1:2007, EN 60947-1:2007/A1:2011, EN 60947-1:2007/A2:2014, EN 60947-3:2009, EN 60947-3:2009/A1:2012, EN 60947-3:2009/A2:2015

The images are purely indicative. Palazzoli reserves the right to make changes without notice.