
TAIS MIGNON SINGLE POLE PUSH BUTTON NC 10A 400V WITH 2 ENTRIES BOTTOM SIDE 3/8"GAS

SERIES TAIS-MIGNON PUSHBUTTON

CODE 261413



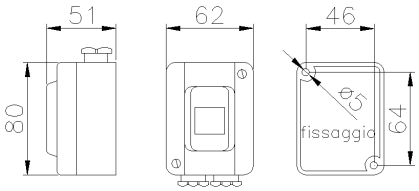

Datasheet

Electrical characteristics

Rated current	10A
Supply Voltage	400V 50/60Hz
Poles	1NC
Rated insulation voltage	-
Insulation Class	II
CAM layout	-
Function Apparatus Control	Other functions
Type of protection	-

Technical data switch

Thermal current	-
Rated short-circuit current	-
Terminals type	Screw - indirect clamping
Conductors section (Cu)	Min: 1 mm² ;Max: 2.5 mm²
Auxiliary status contacts	-
Padlockable handle	-
Operating category	

Mechanical characteristics

Manufacturing material	Palazzoli Thermosetting GRP
Treatment type	-
Surface finishing	-
Color	Blue RAL 5015 (Cover), Grey RAL 7035 (Base)
Execution	Wall mounting
Dimensions	62X80X51 mm
Depth	-
Front-plate dimension	-
Hole type	M16 (5 - 10 mm)
IP Protection degree	IP66/IP67
Additional IPdegree protection	-
Shock resistance	IK04 according to IEC/EN 62262
Resistance to Glow wire	960°C
Flame rating according UL94	V-0
Corrosivity category	-
Net Weight	0.19 KG
Working Environment Temp.	Min: -25°C ;Max: +70°C
Warehousing Temperature	Min: -50°C ;Max: +80°C

Reference Standards and Directives

Certification and approval marks	CE, CB IMQ, IMQ, RINA_ELE20321CS, UKCA
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60669-1:2018, EN 60669-1:2018/AC:2018 -11, EN 60669-1:2018/AC:2020-02, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.

Palazzoli S.p.A. - Società unipersonale - Via F. Palazzoli, 31 - 25128 Brescia - Italy - tel. +39 030 2015.1 - fax +39 030 2015.258 - www.palazzoli.com - export@palazzoli.it