




**SERIES UNIBOX
ENCLOSURE**
CODE 520014NV



Codice	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
520011	45	61	91	65	107	116	140	115	100	120	7
520012	50	65	115	99	121	140	166	141	125	144	7,5
520014	65	80	142	113	153	172	192	168	149	168	7,5
520019	76	93	190	153	188	226	253	217	196	226	10

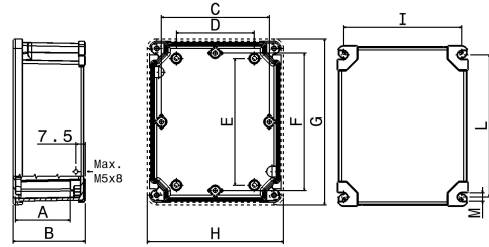

Datasheet

Electrical characteristics

Insulation Class	I
Rated insulation voltage	-
Rated operating voltage	-
Dissipable Power	25W

Mechanical characteristics

Manufacturing material	Aluminum alloy
Treatment type	Fluorozirconic passivation
Surface finishing	-
Color	-
Execution	Wall mounting
Height Box	75 mm
Cover height	8 mm
Cover type	Blind
N. of modules on DIN rail	-
Hole type	-
Window type	-
IP Protection degree	IP66/IP67
Additional IPdegree protection	-
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	C4 (ISO 12944)
Working Environment Temp.	Min: -40°C ;Max: +90°C
Warehousing Temperature	Min: -50°C ;Max: +90°C
Dimensions	168X192X80 mm
Internal dimensions	152X176X65 mm
Net Weight	0.73 KG

Reference Standards and Directives

Certification and approval marks CE, UKCA, CB IMQ, IMQ, NYCE COLOMBIA

Directives 2014/35/EU (LVD)

Reference Standards EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN 62208:2011

The images are purely indicative. Palazzoli reserves the right to make changes without notice.