





**SERIES META  
HIGH BAY**  
**CODE 810661DA**

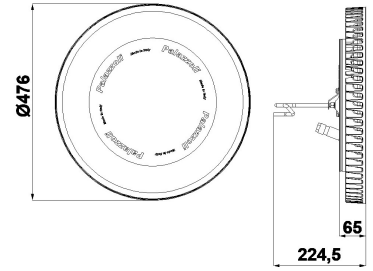

Model Code : META150 MT-S150-GL-40-168-DA-80-40-900-MBD-000



### Datasheet

#### Lighting characteristics

|                               |  |
|-------------------------------|--|
| Output flux                   | 30,260 lm  |
| Luminous flux (TJ=25°C)       | 37,000 lm  |
| Luminaire power               | 215 W  |
| Output efficiency             | 140.7 lm/W   |
| Color temperature             | 4000K  |
| Optics type                   | Anti aging and UV resistant PMMA Lenses with efficiency >90% and transparency >95% |
| Optics                        | Symmetrical medium beam 75°  |
| CRI                           | >80  |
| Color shift                   | 3 MacAdam Step   |
| Photobiological risk EN 62471 | RG0 - Exempt Group   |
| Flicker free                  | < 1%   |
| Life time                     | L90/B10 @110.000h Tq=-30°+40°C,<br>L90 B10 @230.000h Tq=25°C                       |
| Emergency function            | Obtainable with UPS/DALI   |
| Emergency flux                | -  |

#### Electrical characteristics

|                        |  |
|------------------------|--|
| Insulation Class       | I                                      |
| Supply Voltage         | 220-240V 50/60Hz AC/DC 0/50/60Hz       |
| Control system/dimming | DALI                                   |
| Surge protection       | 10kV common mode 6kV differential mode |
| Power factor           | >0,95                                  |
| Hole type              | 5 poles connector                      |
| Max conductor section  | 2.5 mm <sup>2</sup>                    |
| Tightening diameter    | Min 7 mm; Max 13 mm                    |
| Equipment Included     | Suspension hook + connector            |

#### Mechanical characteristics

|                           |  |
|---------------------------|--|
| Manufacturing material    | Aluminum alloy                                   |
| Treatment type            | Fluorozirconic passivation                       |
| Surface finishing         | Atoxic, anti UV polyester paint oven polymerized |
| Colour                    | Grey RAL 7011                                    |
| Diffuser type             | Extraclear tempered glass 4 mm                   |
| IP Protection degree      | IP66/IP67  |
| Shock resistance          | IK08 according to IEC/EN 62262                   |
| Corrosivity category      | Equivalent to C3 (ISO 12944)                     |
| Mounting system           | Quick hook for chain                             |
| Net Weight                | 9.31 KG  |
| Working Environment Temp. | Min: -40°C ;Max: +40°C                           |
| Warehousing Temperature   | Min: -40°C ;Max: +70°C                           |
| Exposed surface           | -  |

#### Reference Standards and Directives

|                                  |  |
|----------------------------------|--|
| Warranty                         | 2 years extendable to 7  |
| Certification and approval marks | DIN 18032-3/EN 13964 (Annex D), UKCA, ENEC 05, CE  |
| Directives                       | 2009/125/EC (ERP), 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/35/EU (LVD), Reg. EU 2019/2020 (EcoDesign)   |
| Reference Standards              | EN 60598-2-1:1989, EN 60598-2-22:2014, EN 60598-2-22:2014/A1:2020, EN 60598-2-22:2014/AC:2015, EN 60598-2-22:2014/AC:2016-05, EN 60598-2-22:2014/AC:2016-09, EN 60598-2-24:2013, EN 60598-2-5:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN 62311:2008, EN 62471:2008, EN 62493:2015, EN IEC 55015:2019, EN IEC 55015:2019/A11:2020, EN IEC 60598-1:2021, EN IEC 60598-1:2021/A11:2022, EN IEC 63000:2018, IEC TR 62778:2014 |



reddot award  
winner

The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.