



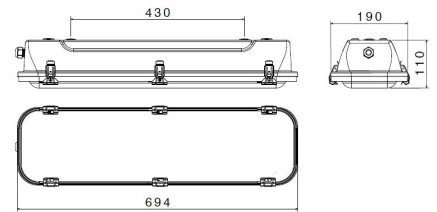

**SERIES RINO**  
**LINEAR FIXTURE**  
**CODE 849011**



### Datasheet

#### Lighting characteristics

Lamp power	(1+1)x14W
Optics type	-
Optics	Symmetric wide
Emergency function	Internal battery duration 3h recharge 24h

#### Mechanical characteristics

Manufacturing material	Galvanized and painted steel
Treatment type	Galvanizing with passivation
Surface finishing	Atoxic, anti UV polyester paint oven polymerized
Colour	WHITE RAL 9016
Diffuser type	Trasparent polycarbonate
IP Protection degree	IP66/IP67
Shock resistance	IK09 according to IEC/EN 62262
Corrosivity category	C3 (ISO 12944)
Net Weight	3.2 KG
Working Environment Temp.	Min: -25°C ;Max: +50°C
Warehousing Temperature	Min: -40°C ;Max: +70°C

#### Electrical characteristics

Insulation Class	I
Supply Voltage	180V-260V 0/50/60Hz
Control system/dimming	Standard on-off
Power Supply Unit	electronic with external emergency kit
Lampholder type	G5
Light source type	T5
Hole type	Terminal block with cable gland M20
Max conductor section	2.5 mm <sup>2</sup>
Tightening diameter	Min 7 mm; Max 15 mm

#### Reference Standards and Directives

Certification and approval marks	UKCA, CE
Directives	2009/125/EC (ERP), 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/30/EU (EMC), 2014/35/EU (LVD), Reg. EU 2019/2020 (EcoDesign)
Reference Standards	EN 55015:2013, EN 60598-1:2015, EN 60598-1:2015/A1:2018, EN 60598-1:2015/AC:2015, EN 60598-1:2015/AC:2016, EN 60598-1:2015/AC:2017, EN 60598-2-1:1989, EN 60598-2-22:2014, EN 60598-2-22:2014/A1:2020, EN 60598-2-22:2014/AC:2015, EN 60598-2-22:2014/AC:2016-05, EN 60598-2-22:2014/AC:2016-09, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN 62311:2008, EN 62471:2008, EN 62493:2015, EN IEC 63000:2018, IEC TR 62778:2014

Equipment Included -

The images are purely indicative. The indicated values of luminous flux and declared power have tolerances of +/- 7%. Palazzoli reserves the right to make changes without notice.